

House configuration list






19 square standard partition

Size: 5.8m×3.3m×3.2m

Total weight: 4T


Coverage area: 19m²

Number of persons: 2

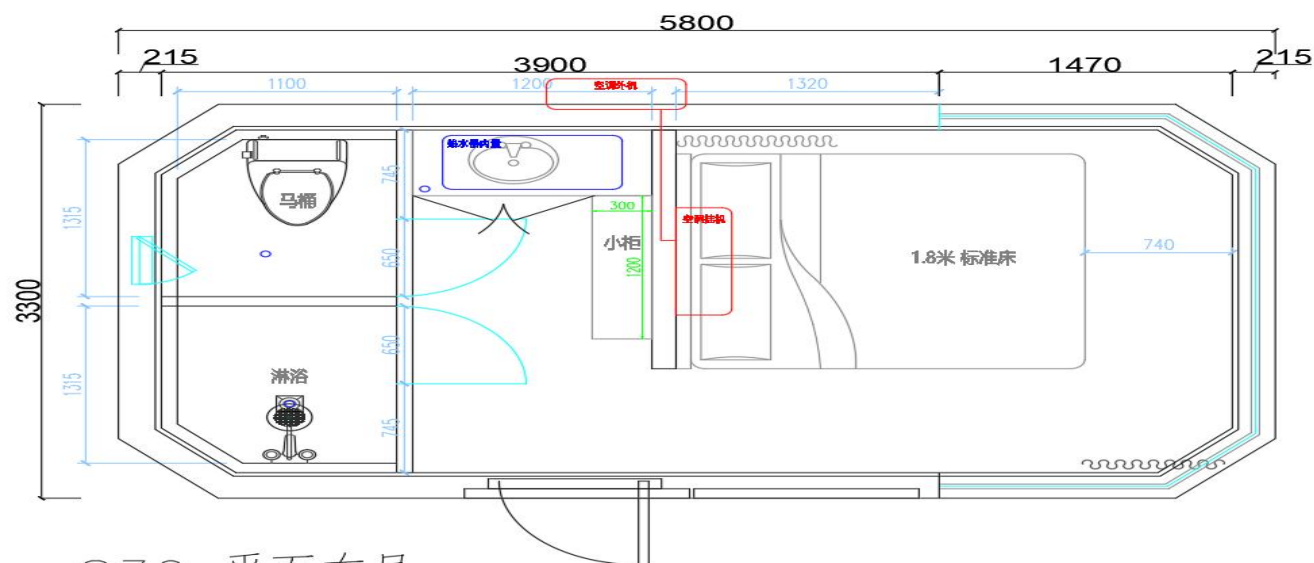

S30 平面布局

5.8m×3.3m×3.2m		19m²
	Specific configuration project	Configuration notes
Exterior walls and structural system	Framework system	100mm*100mm*3.0mm Hot-dip galvanized steel, double main frame, safety guarantee
	Outsider protection system	2.5mm thick aluminum plate, fluorocarbon baked paint
	External modeling light +LOGO light	Developed LED programming ambient light, color change, can be fixed color
	Walls system	100mm polyurethane insulation layer
	Glass curtain wall system	Panoramic wall screen glass (6LOW-E+12A+6 hollow LOW-E tempered glass)
	Water drainage system	Unique hanging tile design drainage
	balcony balustrade	10mm tempered glass
	Front door	The special aluminum door made of 2.5mm thick aluminum plate is equipped with intelligent access control, fingerprint/card/ password
	balcony door	Aluminum alloy heat insulation bridge door
	Dry and wet separation partition doors	Privacy glass side sliding door
Indoor hard finishes	Curtain wall	Special 2.5mm thick aluminum plate ceiling
	Internal wall finishes	Aluminum plate and bamboo fiber wall panel are used
	Super big skylight	Panoramic three-layer glass (6LOW-E+9A+5+0.76pvb+5hollow tempered and rubberized glass)
	Dry separation floor	Plastic flooring
	wash basin	Marble countertop/ceramic sink
	Bathroom mirror	Smart bathroom mirror
	Box + circuit breaker	The distribution box consists of one 2P63A circuit breaker, three 1P40 leakage protectors, three 1P32 leakage protectors and one 1P25 leakage protector. It is suitable for customers in their own countries.
Lighting circuit systems	Room lighting (white)	Key control
	Handwashing room lighting	Key control
	Balcony lighting	Key control
	basin	High-end ceramic washbasin
	tap	Stainless steel faucet copper core, Jiumu brand
	Clothes rack/towel rack	stainless steel
	sprinkler	One body shower copper core, Jiumu brand
	take a breath	Bathroom fresh air system
	stool	Fully automatic intelligent toilet, Jiumu brand
	switch panel	control panel
	Plug-in panel	Universal Socket (suitable for the customers country of origin)
Smart control of electrical appliances	air-conditioning	1.5 air conditioners (wall-mounted and air ducted) meet the national export standards
	water heater	Water heater, in line with the national standard for export

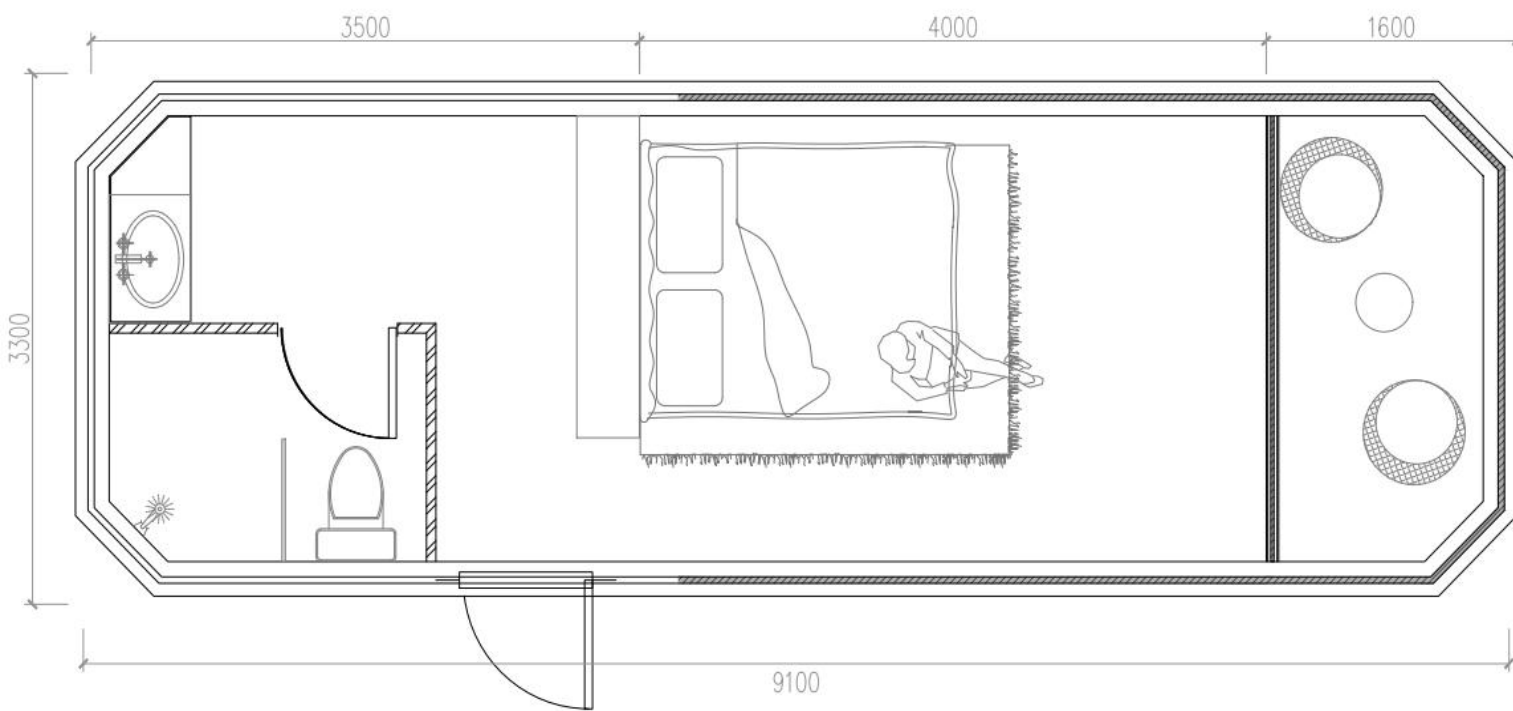

30 square standard partition

Size: 9.2m×3.2m×3.2m


Total weight: 6 T

Coverage area: 30m²

Number of persons: 2



摩椅座-9200

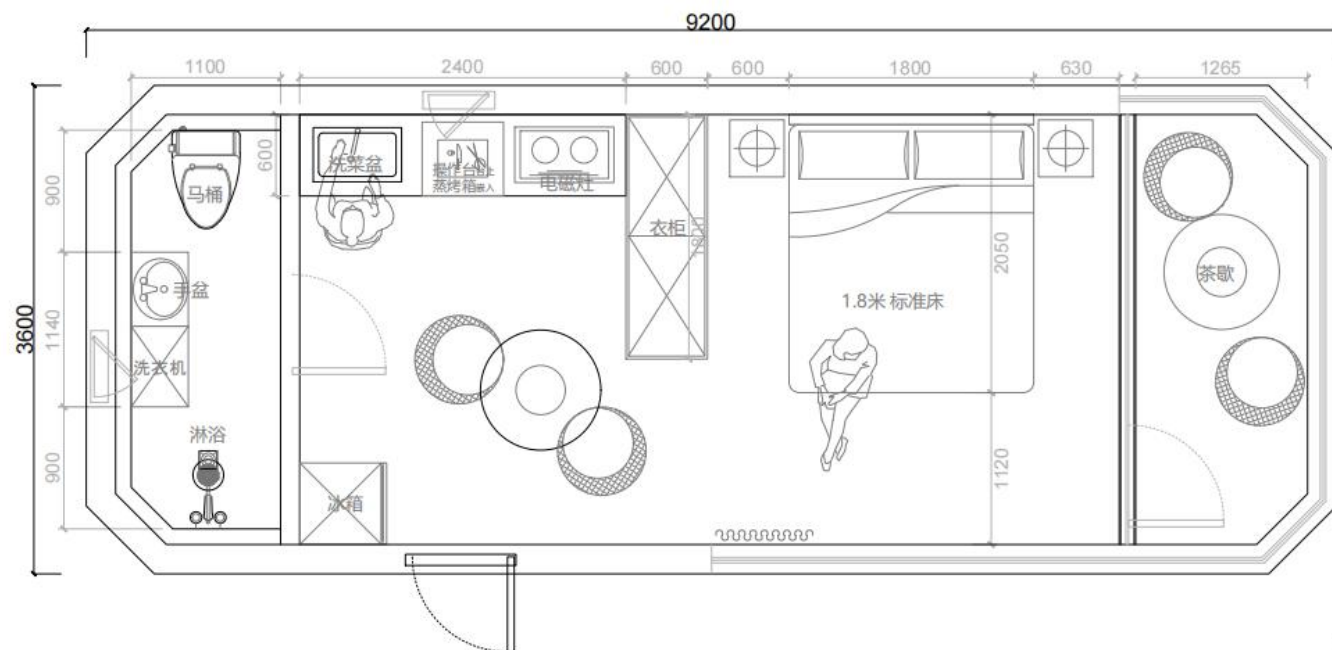

30 square standard partition

Size: 9.2m×3.2m×3.2m

Total weight: 6 T

Coverage area: 30m²

Number of persons: 2

9.2m×3.2m×3.2m		30m²
	Specific configuration project	Configuration notes
Exterior walls and structural systems	Framework system	100mm*100mm*3.0mm Hot-dip galvanized steel, double main frame, safety guarantee
	Outsider protection system	2.5mm thick aluminum plate, fluorocarbon baked paint
	External modeling light +LOGO light	Developed LED programming ambient light, color change, can be fixed color
	Walls system	100mm polyurethane insulation layer
	Glass curtain wall system	Panoramic wall curtain glass (6LOW-E+12A+6 hollow LOW-E tempered glass)
	Water drainage system	Unique hanging tile design drainage
	balcony balustrade	10mm tempered glass
	Front door	The special aluminum door made of 2.5mm thick aluminum plate is equipped with intelligent access control, fingerprint/card swipe/password
	balcony door	Aluminum alloy heat insulation bridge door
	Dry and wet separation partition door	Privacy glass side sliding door
Indoor hard furnishings	Curtain天花	Special 2.5mm thick aluminum plate ceiling
	Internal wall finishes	Aluminum plate and bamboo fiber wall panel are used
	Super big skylight	Panoramic three-layer glass (6LOW-E+9A+5+0.76pvb+5hollow tempered and rubberized glass)
	Dry separation floor	Plastic flooring
	wash basin	Marble countertop/ceramic sink
	Bathroom mirror	Smart bathroom mirror
	Box + circuit breaker	The distribution box consists of one 2P63A circuit breaker, three 1P40 leakage protectors, three 1P32 leakage protectors and one P25 leakage protector. It is suitable for customers in their own country.
Lighting circuit systems	Room lighting (white)	Key control
	Handwashing room lighting	Key control
	Balcony lighting	Key control
	basin	High-end ceramic washbasin
	tap	Stainless steel faucet copper core, Jiumu brand
	Clothes rack/towel rack	stainless steel
	sprinkler	One body shower copper core, Jiumu brand
	take a breath	Bathroom fresh air system
	stool	Fully automatic smart toilet, Jiumu brand
	switch panel	control panel
	Plug-in panel	Universal Socket (suitable for the customers country of origin)
Smart control of electrical appliances	air-conditioning	1.5 air conditioners (wall-mounted and fan-ducted) meet the national export standards
	water heater	Water heater, in line with the national standard for export




38 square standard partition

Size: 11.5m×3.2m×3.2m

Total weight: 7 T

Coverage area: 38m²

Number of persons: 2

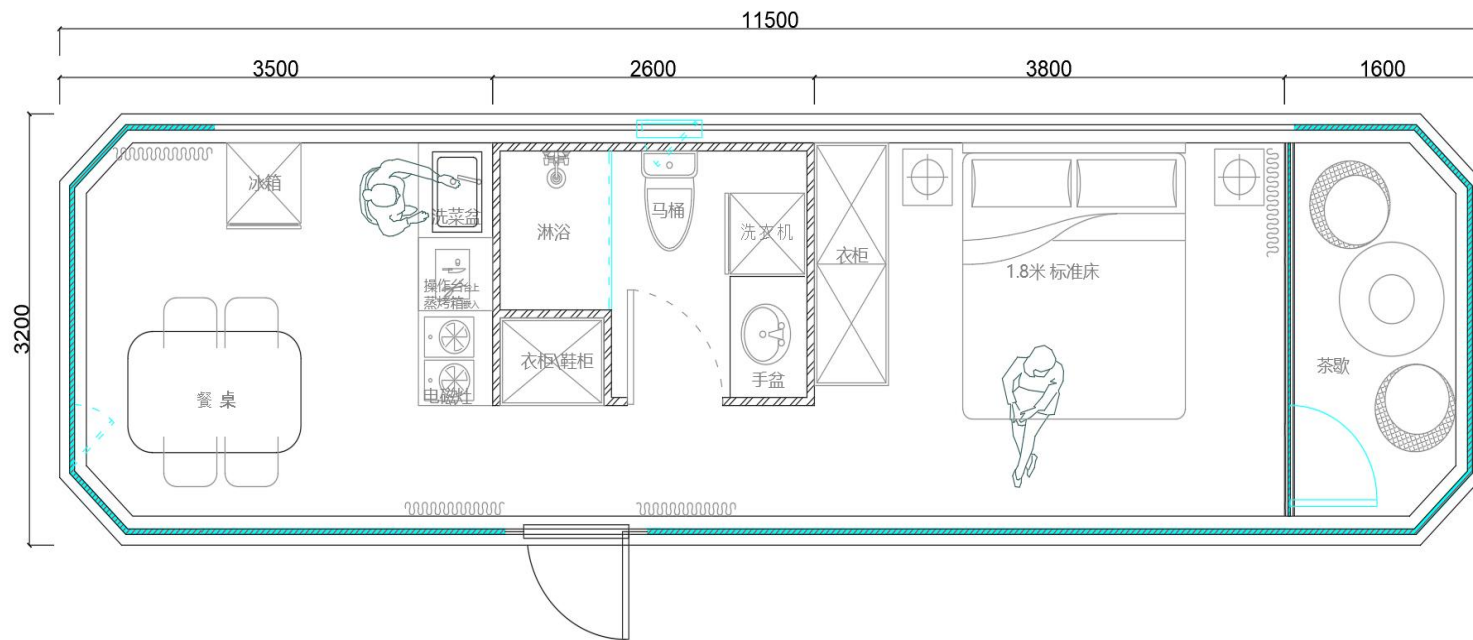




38 square standard partition

Size: 11.5m×3.3m×3.2m

Total weight: 7 T

Coverage area: 38m²

Number of persons: 4

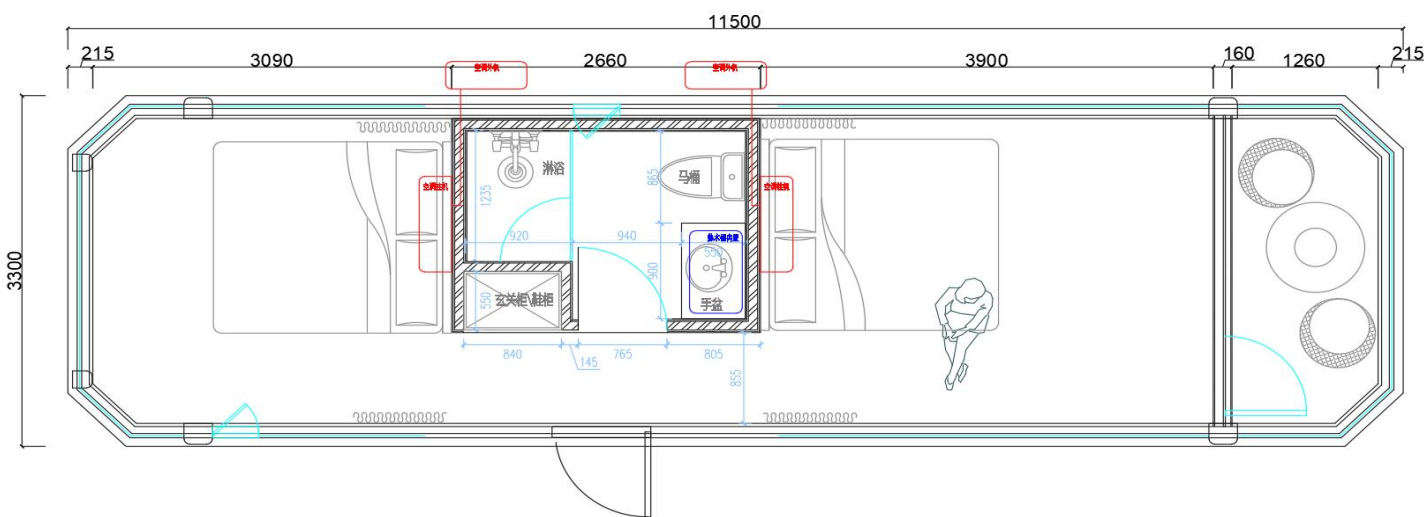

S70 平面布局

11.5m×3.3m×3.2m		38m²
	Specific configuration project	Configuration notes
Exterior walls and structural systems	Framework system	100mm*100mm*3.0mm Hot-dip galvanized steel, double main frame, safety guarantee
	Outsider protection system	2.5mm thick aluminum plate, fluorocarbon baked paint
	External modeling light +LOGO light	Developed LED programming ambient light, color change, can be fixed color
	Walls system	100mm polyurethane insulation layer
	Glass curtain wall system	Panoramic wall curtain glass (6LOW-E+12A+6 hollow LOW-E tempered glass)
	Water drainage system	Unique hanging tile design drainage
	balcony balustrade	10mm tempered glass
	Front door	The special aluminum door made of 2.5mm thick aluminum plate is equipped with intelligent access control for fingerprint/swipe/copy
	balcony door	Aluminum alloy heat insulation bridge door
	Dry and wet separation partition door	Privacy glass side sliding door
Indoor hard finishes	Curtain wall	Special 2.5mm thick aluminum plate ceiling
	Internal wall finishes	Aluminum plate and bamboo fiber wall panel are used
	Super big skylight	Panoramic three-layer glass (6LOW-E+9A+5+0.76pvb+5hollow tempered and rubberized glass)
	Dry separation floor	Plastic flooring
	wash basin	Marble countertop/ceramic sink
	Bathroom mirror	Smart bathroom mirror
	Box + circuit breaker	The distribution box consists of 12P63A circuit breaker and 31P40 leakage protectors, 31P32 leakage protectors and 1P25 leakage protectors. It is suitable for customers in their own countries.
Lighting circuit systems	Room lighting (white)	Key control
	Handwashing room lighting	Key control
	Balcony lighting	Key control
	basin	High-end ceramic washbasin
	tap	Stainless steel faucet copper core, Jiumu brand
	Clothes rack/towel rack	stainless steel
	sprinkler	One body shower copper core, Jiumu brand
	take a breath	Bathroom fresh air system
	stool	Fully automatic intelligent toilet, Jiumu brand
	switch panel	control panel
	Plug-in panel	Universal Socket (suitable for the customers country of origin)
Smart electrical control	air-conditioning	1.5 air conditioners (wall-mounted and fan-ducted) meet the national export standards
	water heater	Water heater, in line with the national standard for export




25 square standard partition

Size: 7.5m×3.2m×3.2m

Total weight: 4.5 T

Coverage area: 25m²

Number of persons: 2

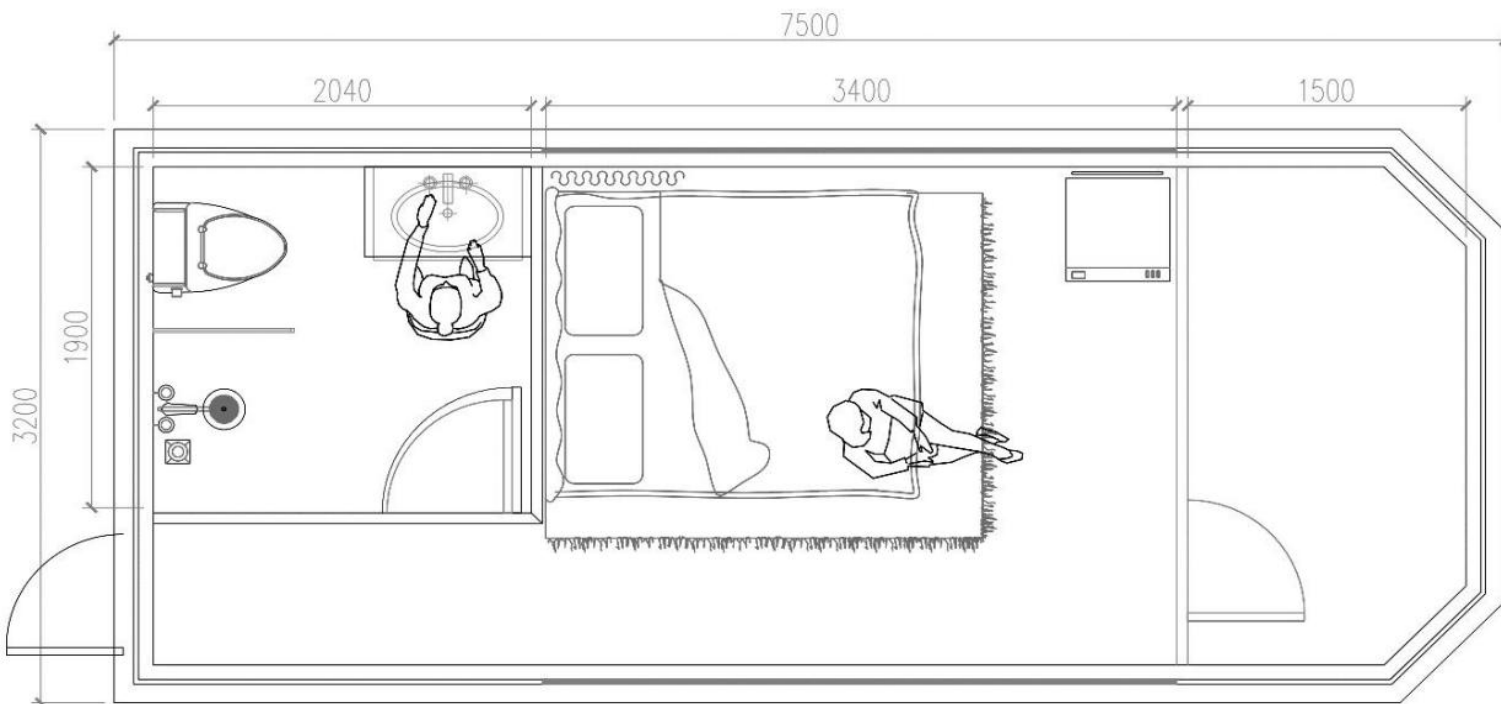

7.5m×3.2m×3.2m		25m²
	Specific configuration project	Configuration notes
Exterior walls and structural systems	Framework system	100mm*100mm*3.0mm Hot-dip galvanized steel, double main frame, safety guarantee
	Outsider protection system	2.0mm thick aluminum plate, fluorocarbon baked paint
	External modeling light +LOGO light	Developed LED programming ambient light, color change, can be fixed color
	Walls system	100mm polyurethane insulation layer
	Glass curtain wall system	Panoramic wall curtain glass (6LOW-E+12A+6 hollow LOW-E tempered glass)
	Water drainage system	Unique hanging tile design drainage
	balcony balustrade	10mm tempered glass
	Front door	The special aluminum door made of 2.0mm thick aluminum plate is equipped with intelligent access control with fingerprint/swipe/copy
	balcony door	Aluminum alloy heat insulation bridge door
	Dry and wet separation partition door	Privacy glass side sliding door
Indoor hard finishes	Curtain wall	Special suspended ceiling with 2.0mm thick aluminum plate
	Internal wall finishes	Aluminum plate and bamboo fiber wall panel are used
	Super big skylight	Panoramic three-layer glass (6LOW-E+9A+5+0.76pvb+5hollow tempered and rubberized glass)
	Dry separation floor	Plastic flooring
	wash basin	Marble countertop/ceramic sink
	Bathroom mirror	Smart bathroom mirror
	Box + circuit breaker	The distribution box consists of 12P63A circuit breaker, 31P40 leakage protectors, 31P32 leakage protectors and 1P25 leakage protector. It is suitable for customers in their own country.
Lighting circuit systems	Room lighting (white)	Key control
	Handwashing room lighting	Key control
	Balcony lighting	Key control
	basin	High-end ceramic washbasin
	tap	Stainless steel faucet copper core, Jiumu brand
	Clothes rack/towel rack	stainless steel
	sprinkler	One body shower copper core, Jiumu brand
	take a breath	Bathroom fresh air system
	stool	Fully automatic smart toilet, Jiumu brand
	switch panel	control panel
	Plug-in panel	Universal Socket (suitable for the customers country of origin)
Smart control of electrical appliances	air-conditioning	1.5 air conditioners (wall-mounted or fan-duct unit) meet the national export standards
	water heater	Water heater, in line with national export standards




45 square standard partition

Size: 9.2m× 6.6m×3.2 m

Total weight: 7.5 T

Coverage area: 45m²

Number of persons: 4

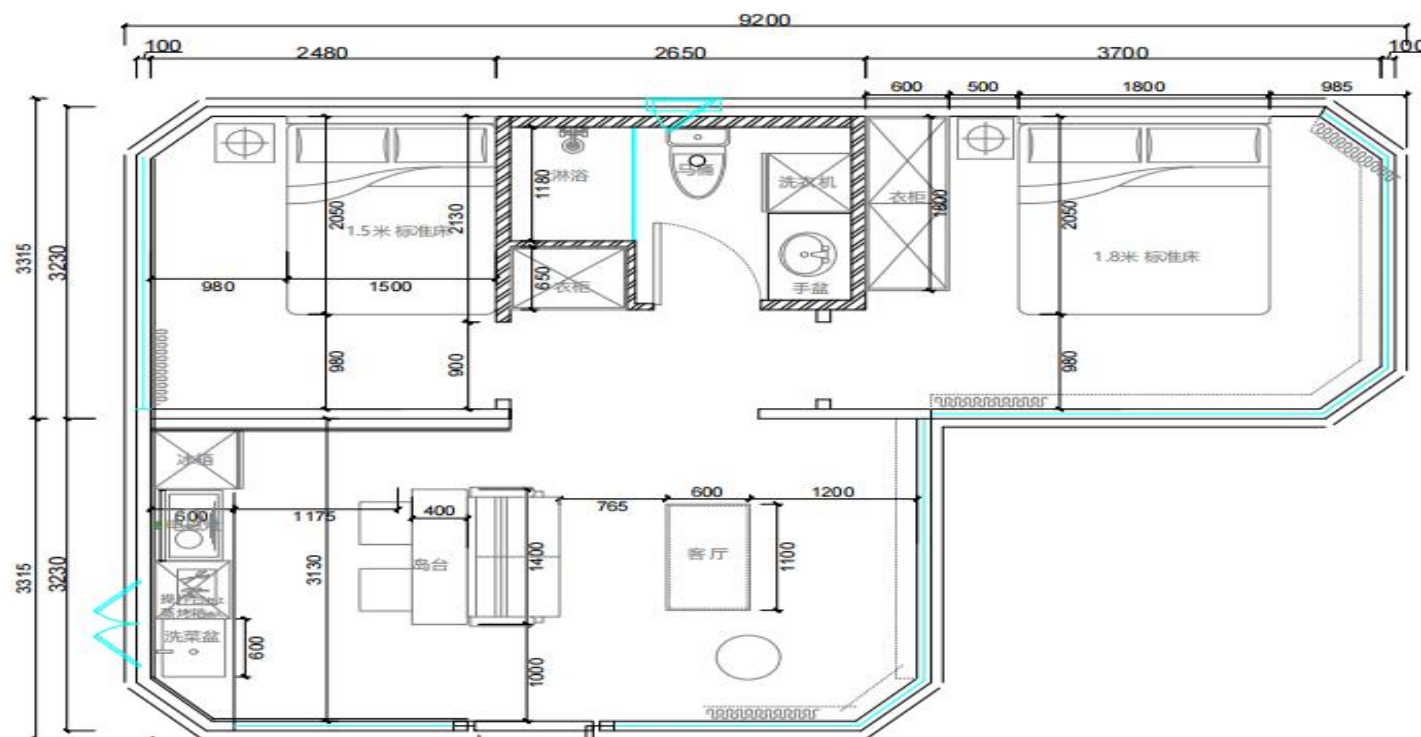

9.2m× 6.6m×3.2m		45m²
	Specific configuration project	Configuration notes
Exterior walls and structural systems	Framework system	100mm*100mm*3.0mm Hot-dip galvanized steel, double main frame, safety guarantee
	Outsider protection system	2.5mm thick aluminum plate, fluorocarbon baked paint
	External modeling light +LOGO light	Developed LED programming ambient light, color change, can be fixed color
	Walls system	100mm polyurethane insulation layer
	Glass curtain wall system	Panoramic wall curtain glass (6LOW-E+12A+6 hollow LOW-E tempered glass)
	Water drainage system	Unique hanging tile design drainage
	balcony balustrade	10mm tempered glass
	Front door	The special aluminum door made of 2.5mm thick aluminum plate is equipped with intelligent access control, fingerprint/card swipe/password
	balcony door	Aluminum alloy heat insulation bridge door
	Dry and wet separation partition door	Privacy glass side sliding door
Indoor hard finishes	Curtain天花	Special 2.5mm thick aluminum plate ceiling
	Internal wall finishes	Aluminum plate and bamboo fiber wall panel are used
	Super big skylight	Panoramic three-layer glass (6LOW-E+9A+5+0.76pvb+5hollow tempered and rubberized glass)
	Dry separation floor	Plastic flooring
	wash basin	Marble countertop/ceramic sink
	Bathroom mirror	Smart bathroom mirror
	Box + circuit breaker	The distribution box consists of 12P63A circuit breaker and 31P40 leakage protectors, 31P32 leakage protectors and 1P25 leakage protectors. It is suitable for customers in their own country.
Lighting circuit systems	Room lighting (white)	Key control
	Handwashing room lighting	Key control
	Balcony lighting	Key control
	basin	High-end ceramic washbasin
	tap	Stainless steel faucet copper core, Jiumu brand
	Clothes rack/towel rack	stainless steel
	sprinkler	One body shower copper core, Jiumu brand
	take a breath	Bathroom fresh air system
	stool	Fully automatic smart toilet, Jiumu brand
	switch panel	control panel
	Plug-in panel	Universal Socket (suitable for the customers country of origin)
Smart control of electrical appliances	air-conditioning	1.5 air conditioners (wall-mounted and fan-ducted) meet the national export standards
	water heater	Water heater, in line with the national standard for export

11.5m× 11.5m×3.2m		106m²
	Specific configuration project	Configuration notes
Exterior walls and structural systems	Framework system	100mm*100mm*3.0mm Hot-dip galvanized steel, double main frame, safety guarantee
	Outsider protection system	2.5mm thick aluminum plate, fluorocarbon baked paint
	External modeling light +LOGO light	Developed LED programming ambient light, color change, can be fixed color
	Walls system	100mm polyurethane insulation layer
	Glass curtain wall system	Panoramic wall curtain glass (6LOW-E+12A+6 hollow LOW-E tempered glass)
	Water drainage system	Unique hanging tile design drainage
	balcony balustrade	10mm tempered glass
	Front door	The special aluminum door made of 2.5mm thick aluminum plate is equipped with intelligent access control with fingerprint/swipe/copy
	balcony door	Aluminum alloy heat insulation bridge door
	Dry and wet separation partition doors	Privacy glass side sliding door
Indoor hard finishes	Curtain wall	Special 2.5mm thick aluminum plate ceiling
	Internal wall finishes	Aluminum plate and bamboo fiber wall panel are used
	Super big skylight	Panoramic three-layer glass (6LOW-E+9A+5+0.76pvb+5hollow tempered and rubberized glass)
	Dry separation floor	Plastic flooring
	wash basin	Marble countertop/ceramic sink
	Bathroom mirror	Smart bathroom mirror
	Box + circuit breaker	The distribution box consists of one 2P63A circuit breaker, three 1P40 leakage protectors, three 1P32 leakage protectors and one P25 leakage protector. It is suitable for customers in their own country.
Lighting circuit systems	Room lighting (white)	Key control
	Handwashing room lighting	Key control
	Balcony lighting	Key control
	basin	High-end ceramic washbasin
	tap	Stainless steel faucet copper core, Jiumu brand
	Clothes rack/towel rack	stainless steel
	sprinkler	One body shower copper core, Jiumu brand
	take a breath	Bathroom fresh air system
	stool	Fully automatic smart toilet, Jiumu brand
	switch panel	control panel
	Plug-in panel	Universal Socket (suitable for customer country)
Smart control of electrical appliances	air-conditioning	1.5 air conditioners (wall-mounted and fan-ducted) meet the national export standards
	water heater	Water heater, in line with the national standard for export




212 square standard partition

Size: 11.5m × 11.5m × 6.1 m

Total weight:
30 T

Coverage area:
212m²

Number of
participants:
6-10

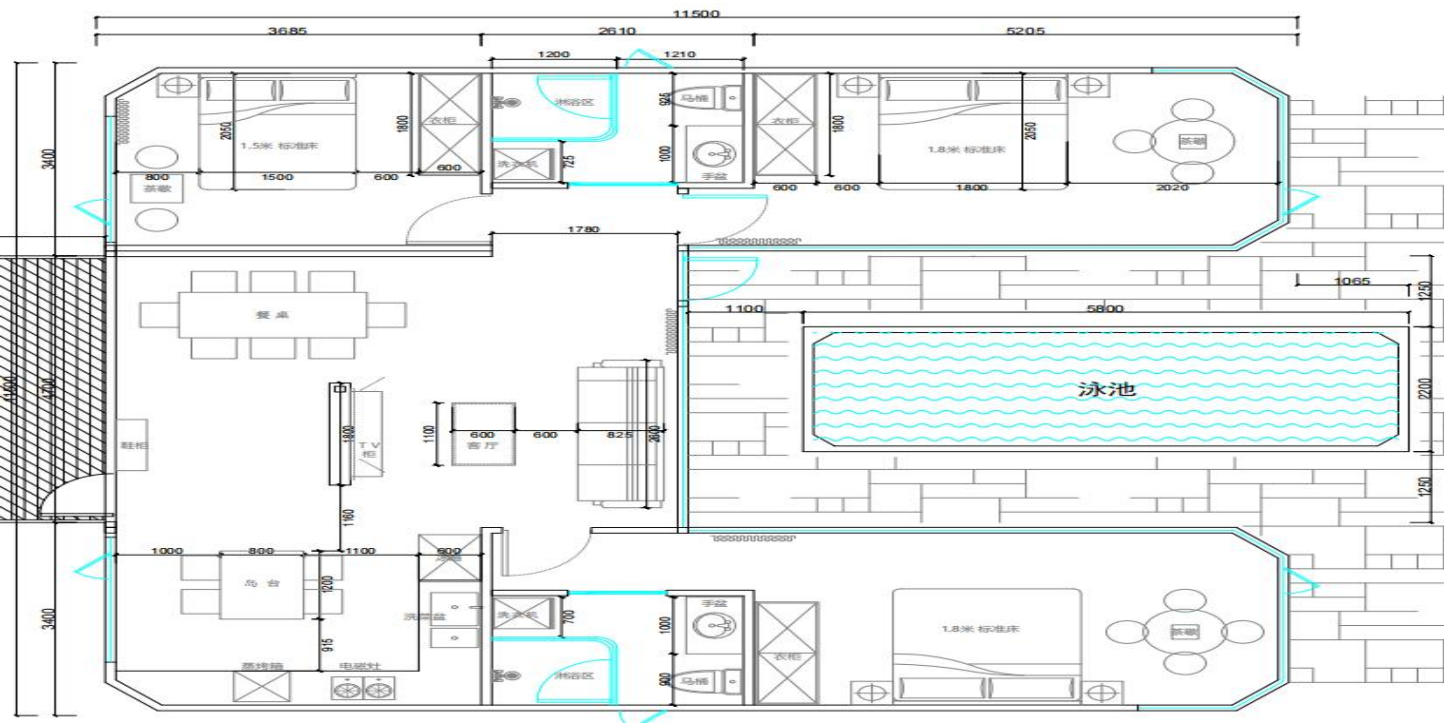


11.5m× 11.5m× 6.1m		212m²
	Specific configuration project	Configuration notes
Exterior walls and structural systems	Framework system	100mm*100mm*3.0mm Hot-dip galvanized steel, double main frame, safety guarantee
	Outsider protection system	2.5mm thick aluminum plate, fluorocarbon baked paint
	External modeling light +LOGO light	Developed LED programming ambient light, color change, can be fixed color
	Walls system	100mm polyurethane insulation layer
	Glass curtain wall system	Panoramic wall curtain glass (6LOW-E+12A+6 hollow LOW-E tempered glass)
	Water drainage system	Unique hanging tile design drainage
	balcony balustrade	10mm tempered glass
	Front door	The special aluminum door made of 2.5mm thick aluminum plate is equipped with intelligent access control, fingerprint/card/ password
	balcony door	Aluminum alloy heat insulation bridge door
Indoor hard finishes	Dry and wet separation partition door	Privacy glass side sliding door
	Curtain wall	Special 2.5mm thick aluminum plate ceiling
	Internal wall finishes	Aluminum plate and bamboo fiber wall panel are used
	Super big skylight	Panoramic three-layer glass (6LOW-E+9A+5+0.76pvb+5hollow tempered and rubberized glass)
	Dry separation floor	Plastic flooring
	wash basin	Marble countertop/ceramic sink
	Bathroom mirror	Smart bathroom mirror
Lighting circuit systems	Box + circuit breaker	The distribution box consists of 12P63A circuit breaker and 31P40 leakage protectors, 31P32 leakage protectors and 1P25 leakage protectors. It is suitable for customers in their own countries.
	Room lighting (white)	Key control
	Handwashing room lighting	Key control
	Balcony lighting	Key control
	basin	High-end ceramic washbasin
	tap	Stainless steel faucet copper core, Jiumu brand
	Clothes rack/towel rack	stainless steel
	sprinkler	One body shower copper core, Jiumu brand
	take a breath	Bathroom fresh air system
	stool	Fully automatic intelligent toilet, Jiumu brand
	switch panel	control panel
Smart control of electrical appliances	Plug-in panel	Universal Socket (suitable for the customers country of origin)
	air-conditioning	1.5 air conditioners (wall-mounted or air ducted) meet the national export standards
	water heater	Water heater, in line with the national standard for export



Nebula Cabin customization

Size: Customizable as required



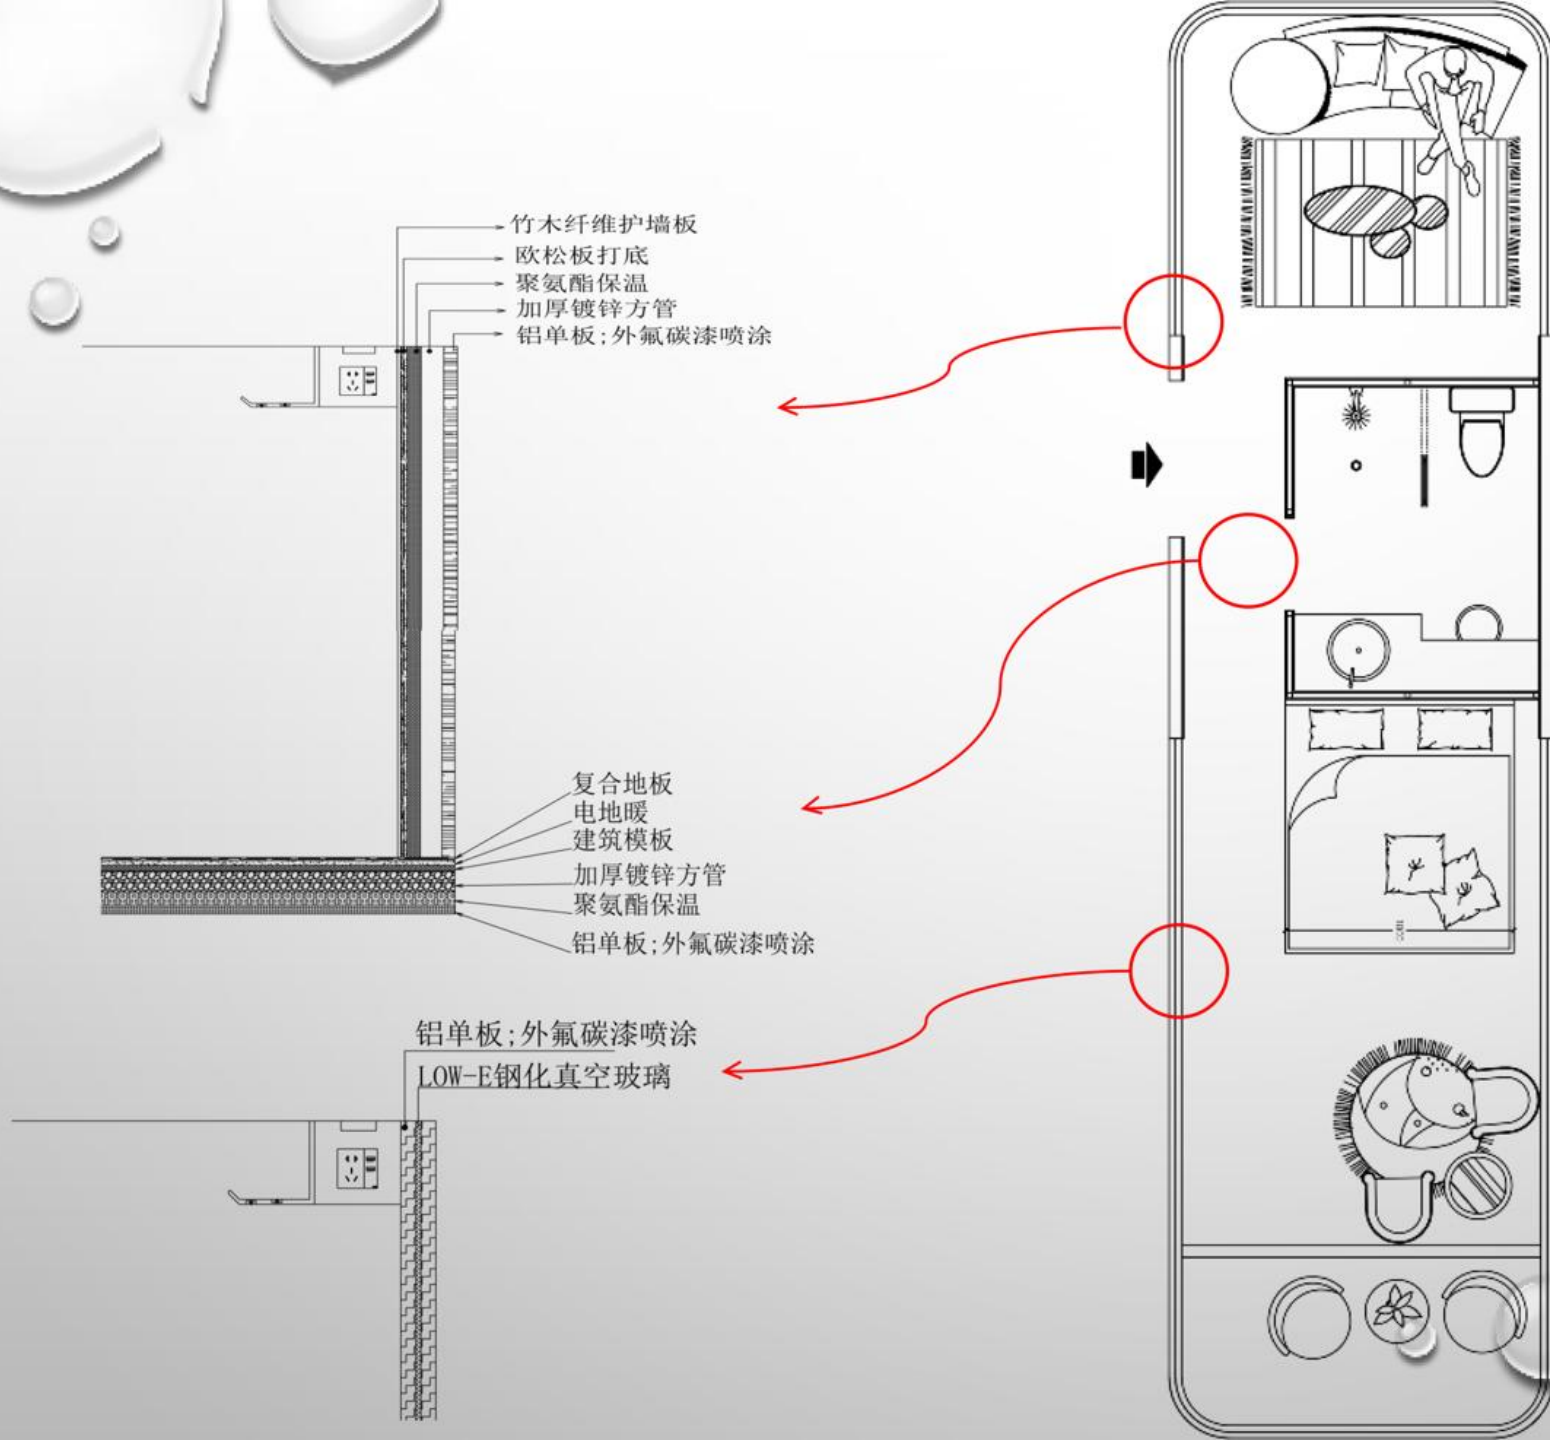

外壳结构	3.0mm厚热镀锌钢, 双层主框架, 2.5mm厚采用铝板, 氟碳烤漆
门窗系统	阳台: 断桥铝阳台门窗 卫生间、浴室: 钢化玻璃隔断, 感应背光化妆镜, 智能马桶 舱体两侧: 二层LOW-E钢化真空玻璃 舱顶: 二层LOW-E钢化真空玻璃
开关插座	开关插座
墙面	120mm厚保温层, 20mm厚欧松板木基础, 铝合金吊顶, 环保木饰面
电源线	国标: 零线、火线、地线入舱16平方、热水器6平方、墙壁插座4平方、灯线2平方
卫浴洁具	马桶、手盆、淋浴
智能系统	电动窗帘, 电动遮阳帘, 密码锁. 灯光、智能空调, 投影与幕布接口、智能家居

Detailed list of materials



Steel Frame System: Steel columns and beams form the core support framework of the entire structure. In the wall and roof systems, $100 \times 100 \times 3$ galvanized square tubes with wall thickness are employed as vertical load-bearing columns, while steel beams serve as horizontal load-bearing components. These elements play a crucial role in connecting steel columns and supporting roof structures, bearing both permanent and live loads on the roof surface. They transfer these loads to steel columns while working in coordination to resist bending moments and shear forces caused by horizontal loads. Vertically, steel columns must possess sufficient lateral stiffness and strength to withstand wind loads and seismic forces. Additionally, steel columns and beams form a robust frame structure through reliable welding connections, providing solid support and anchoring points for wall and roof systems. This integrated framework tightly bonds all components, collectively resisting various external environmental forces to deliver safe and stable usage spaces.

External Enclosure System: Beyond the steel frame, all visible metal elements inside and outside the structure are clad with 2.5mm-thick fluorocarbon-coated aluminum panels.



Exterior Wall Structure: The building features exterior walls constructed with 2.5mm fluorocarbon-coated aluminum panels. These panels are sandwiched between $100\text{mm} \times 100\text{mm} \times 3\text{m}$ galvanized steel frames, with a 100mm polyurethane insulation layer in the middle. The composite structure further incorporates a 10mm synthetic rubber board, 15mm OSB board, and finally 600mm-wide $\times$ 9mm-thick bamboo-wood fiber wall panels, achieving a total wall thickness of 210mm. This innovative design effectively prevents heat loss between interior and exterior while providing corrosion resistance and moisture protection.

Detailed list of materials



Roof Structure: The exterior features a 2.5mm aluminum single panel with a zinc-coated steel frame (100mm×100mm×3mm) at the core. This composite structure includes: 100mm polyurethane insulation, 50mm hollow insulation layer, 25mm nitrile rubber insulation board, and 2.5mm aluminum ceiling panel. With a total thickness of 180mm, this integrated design provides corrosion resistance, moisture protection, thermal insulation, and effective rainwater drainage.



The base structure features: 12mm composite flooring with moisture-proof pads, followed by 15mm high-strength construction formwork and 40x40 galvanized steel grid. A 180mm hollow insulation layer is installed alongside 100x100x3 galvanized steel studs, with a 100mm polyurethane insulation layer filling the gap between them. The exterior surface uses 2.5mm aluminum single-layer panels, while 100mm-high support feet ensure stable grounding. This design delivers superior thermal insulation, moisture resistance, and corrosion protection for long-lasting durability.

Detailed list of materials



Entry door: a special aluminum door made of 2.5mm thick fluorocarbon paint aluminum plate with 60mm thick polyurethane in the middle layer, and equipped with intelligent access control with fingerprint/swipe/copy. The safety protection effectively isolates external sound.



Insulation material: 100mm rear flame retardant polyurethane is used. Polyurethane products have the characteristics of light weight, high strength, heat insulation, sound insulation, flame retardant, cold resistance, corrosion resistance and non-absorption.

Detailed list of materials



Indoor flooring: The interior features three-layer solid wood composite flooring. Constructed through cross-laminated oak planks, this innovative design overcomes the one-way homogeneity issues of traditional solid wood flooring while maintaining natural wood grain patterns and comfortable foot comfort. Combining the stability of engineered wood flooring with the aesthetic appeal of solid wood, it delivers superior dimensional stability and eco-friendly advantages.



Bamboo and Wood Fiber Maintenance Wall Panel: A novel composite material formulated with natural bamboo powder, wood powder, lightweight calcium carbonate, and polymer resin, combined with flame retardants, waterproofing agents, stabilizers, and paraffin wax. Manufactured through high-temperature processes including extrusion molding, compression molding, and film coating techniques, this durable material resists deformation and maintains structural integrity.

Detailed list of materials



OSB Board: This engineered wood product is manufactured from wood chips processed through specialized equipment into veneer sheets. Through processes including degreasing, drying, and hot-press molding, it forms a high-performance oriented structural board. The board boasts a dense structure with exceptional strength, excellent deformation resistance, anti-peel properties, and warping resistance. It also offers corrosion resistance, insect-proofing, flame retardancy, waterproofing, thermal insulation, and superior soundproofing capabilities.




The windows feature 1.6mm thick aluminum alloy insulated glass units (IGU), with a thermal break design that effectively reduces heat transfer. This energy-efficient system maintains warmth in winter and coolness in summer while ensuring excellent airtightness and waterproof performance. Crafted with PA66 nylon strips and EPDM sealing rubber strips, the construction minimizes heat loss while guaranteeing superior air-tightness. Premium hardware components ensure smooth door/window operation and extended durability. The double-glazed system (6+12A+6) utilizes a cavity design with interstitial gas filling, significantly enhancing thermal insulation and soundproofing capabilities. Notably, thicker glass layers deliver superior performance in both heat retention and noise reduction.

Detailed list of materials



The bathroom features a dry-wet separation design with marble countertop, high-end ceramic sink, stainless steel integrated shower, heat exchange ventilation system, smart toilet, and 80x60 cm bathroom mirror. The plastic flooring is slip-resistant, wear-resistant, waterproof and moisture-proof.

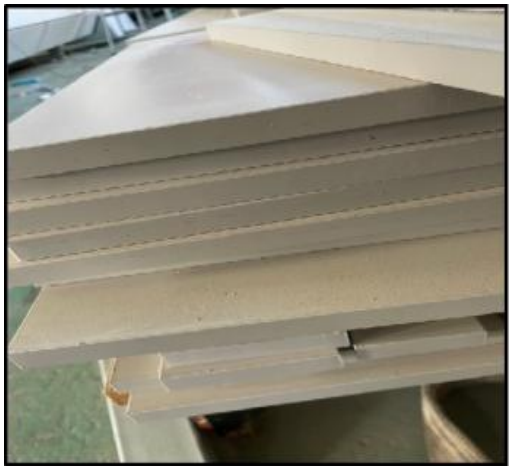

Kitchen configuration: Pre-installed water supply and drainage outlets, a simple operation counter, and cabinets can be customized according to client requirements (Kitchen appliances are the buyers responsibility). The bathroom storage cabinet and built-in cabinet materials utilize dual-faced particle board, which is made from wood raw materials through multiple processing steps including slicing, laying, drying, and hot pressing.

Detailed list of materials



Circuit Lighting System: All electrical installations will be concealed within walls, ceilings, and floors. The distribution box contains one 2P63A circuit breaker, three 1P40 residual current devices (RCD), three 1P32 RCDs, and one 1P25 RCD. All wiring employs CE-certified BV copper core conductors. Water pipes utilize 20mm-diameter PPR hot-melt pipes.



Modular decomposition techniques

The Nebula Cabin is designed in a modular way

Easy to transport, quick assembly.
Greatly shorten the construction period.



Camp display



Star Cloud Cabin Camp, Lanzhou City, Gansu Province



Starship capsule daytime scene and night scene



Ski resort camp in Qiqihar City, Heilongjiang Province



Xingyun Cabin Camp, Seda County, Ganzi Tibetan Autonomous Prefecture, Sichuan Province



Lake Chalvaq, Tashkent, capital of Uzbekistan



Xingyun Cabin Camp, Tumen River, Jilin Province



The cabin scene

